Coolant circulation

Three established process legs; proposed measurement and isolation locations shown in amber.

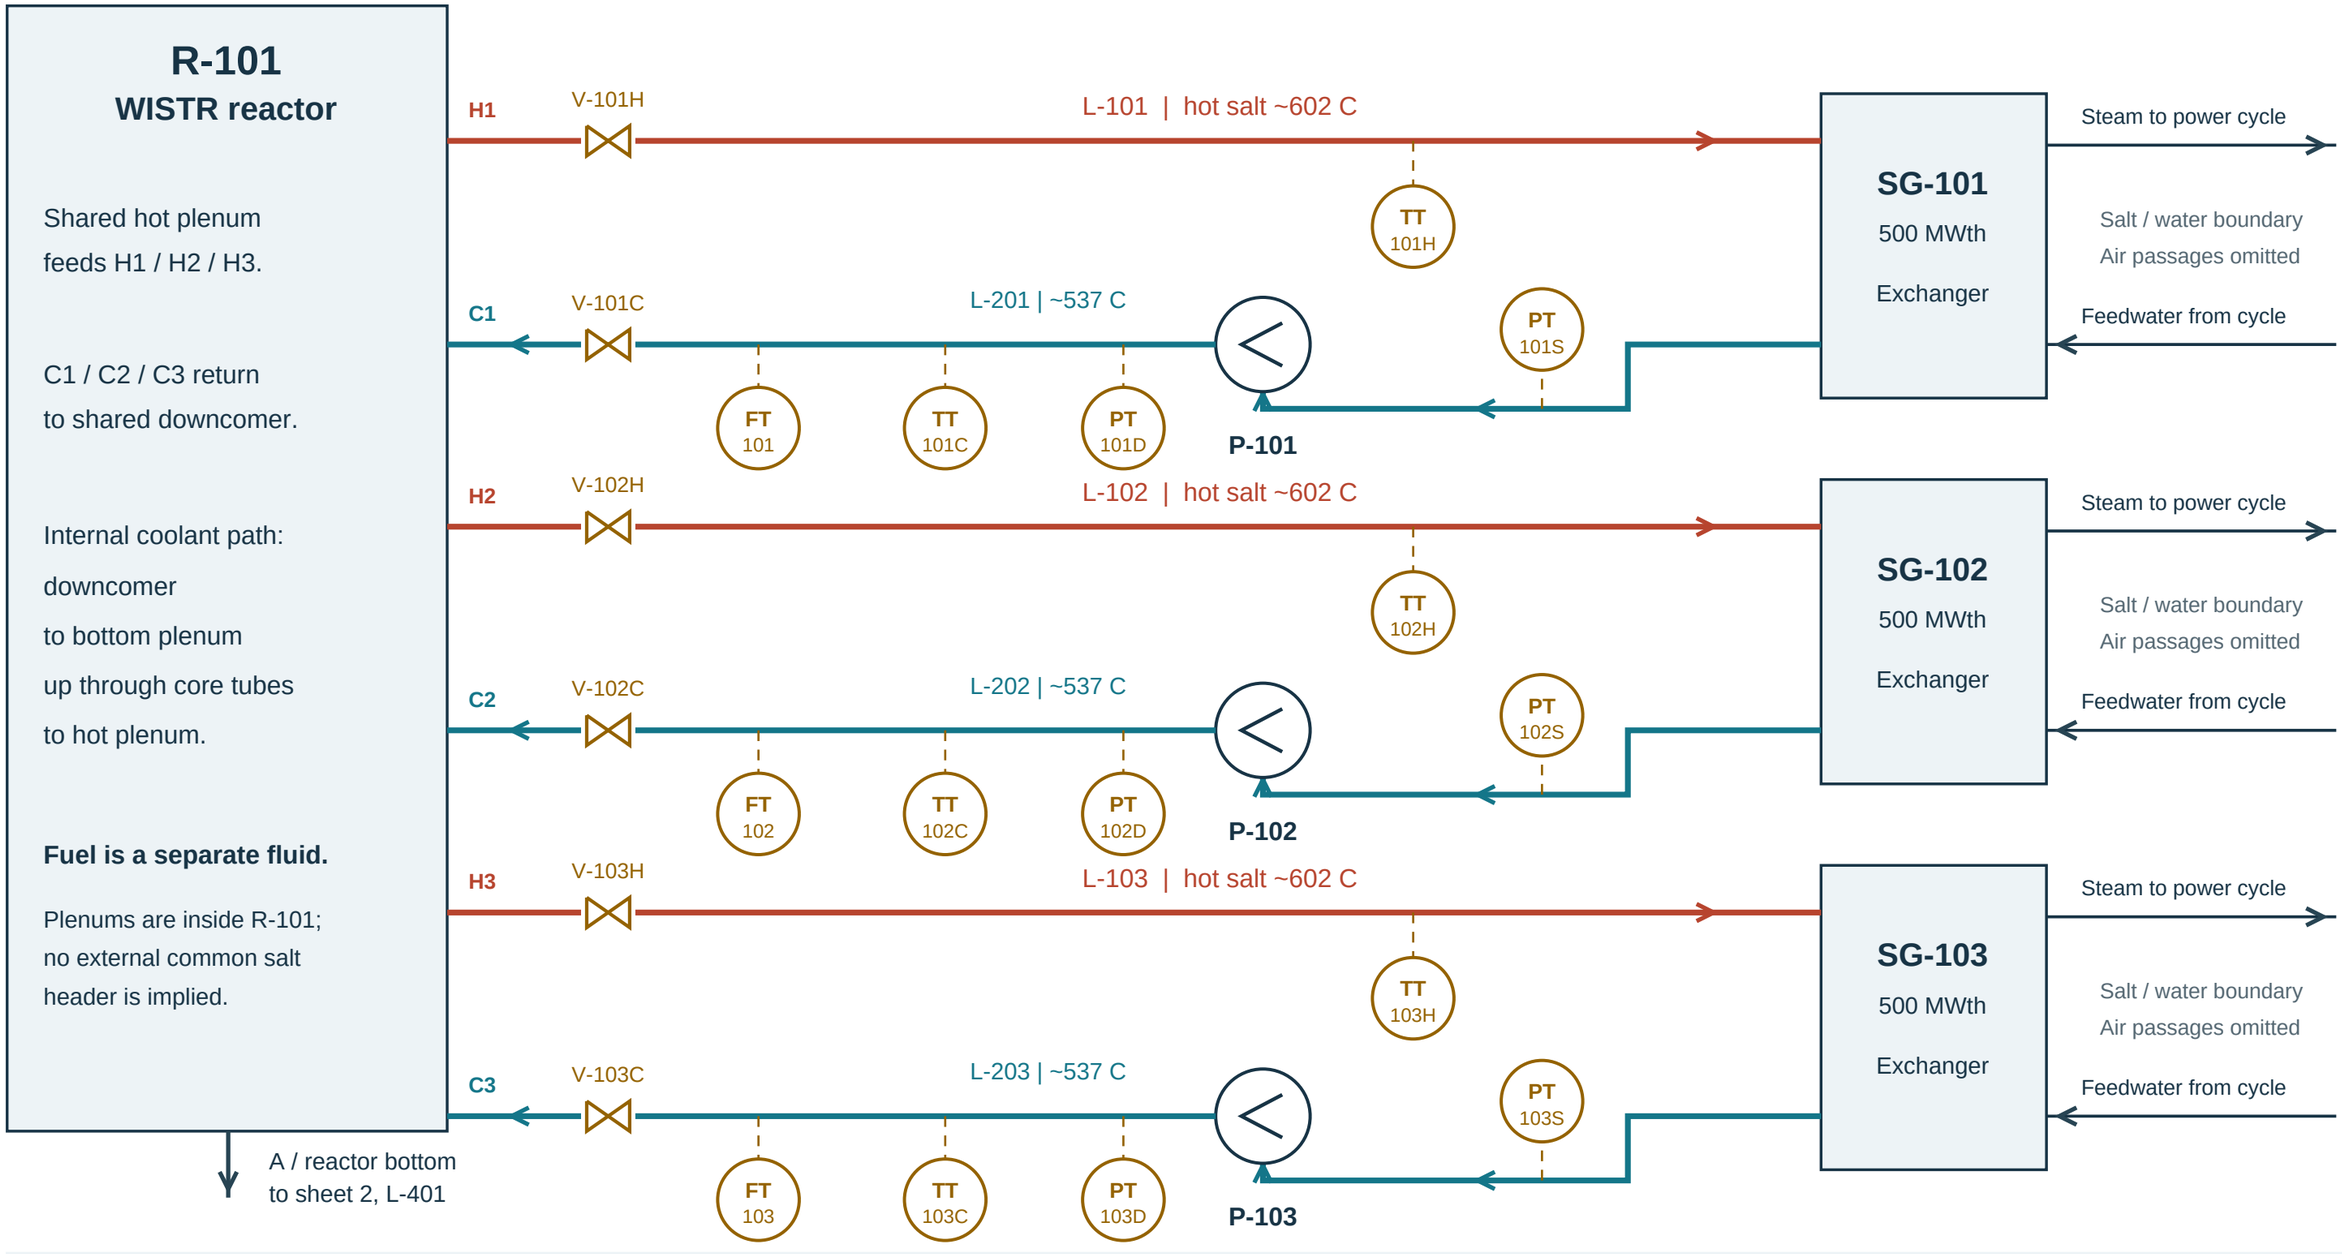

PER LEG: 4.620 m3/s; pump rise 286 kPa; 1.65 MW shaft; provisional 2 MW motor. Main line bore 1425 mm.

Main wall 25 mm; radial insulation hot 400 / return 350 mm (conditional estimates). Pump rise is not system design pressure.

Coolant storage, transfer and review points

Established transfer direction retained. No reverse-flow, vent destination or automatic protection is assumed.

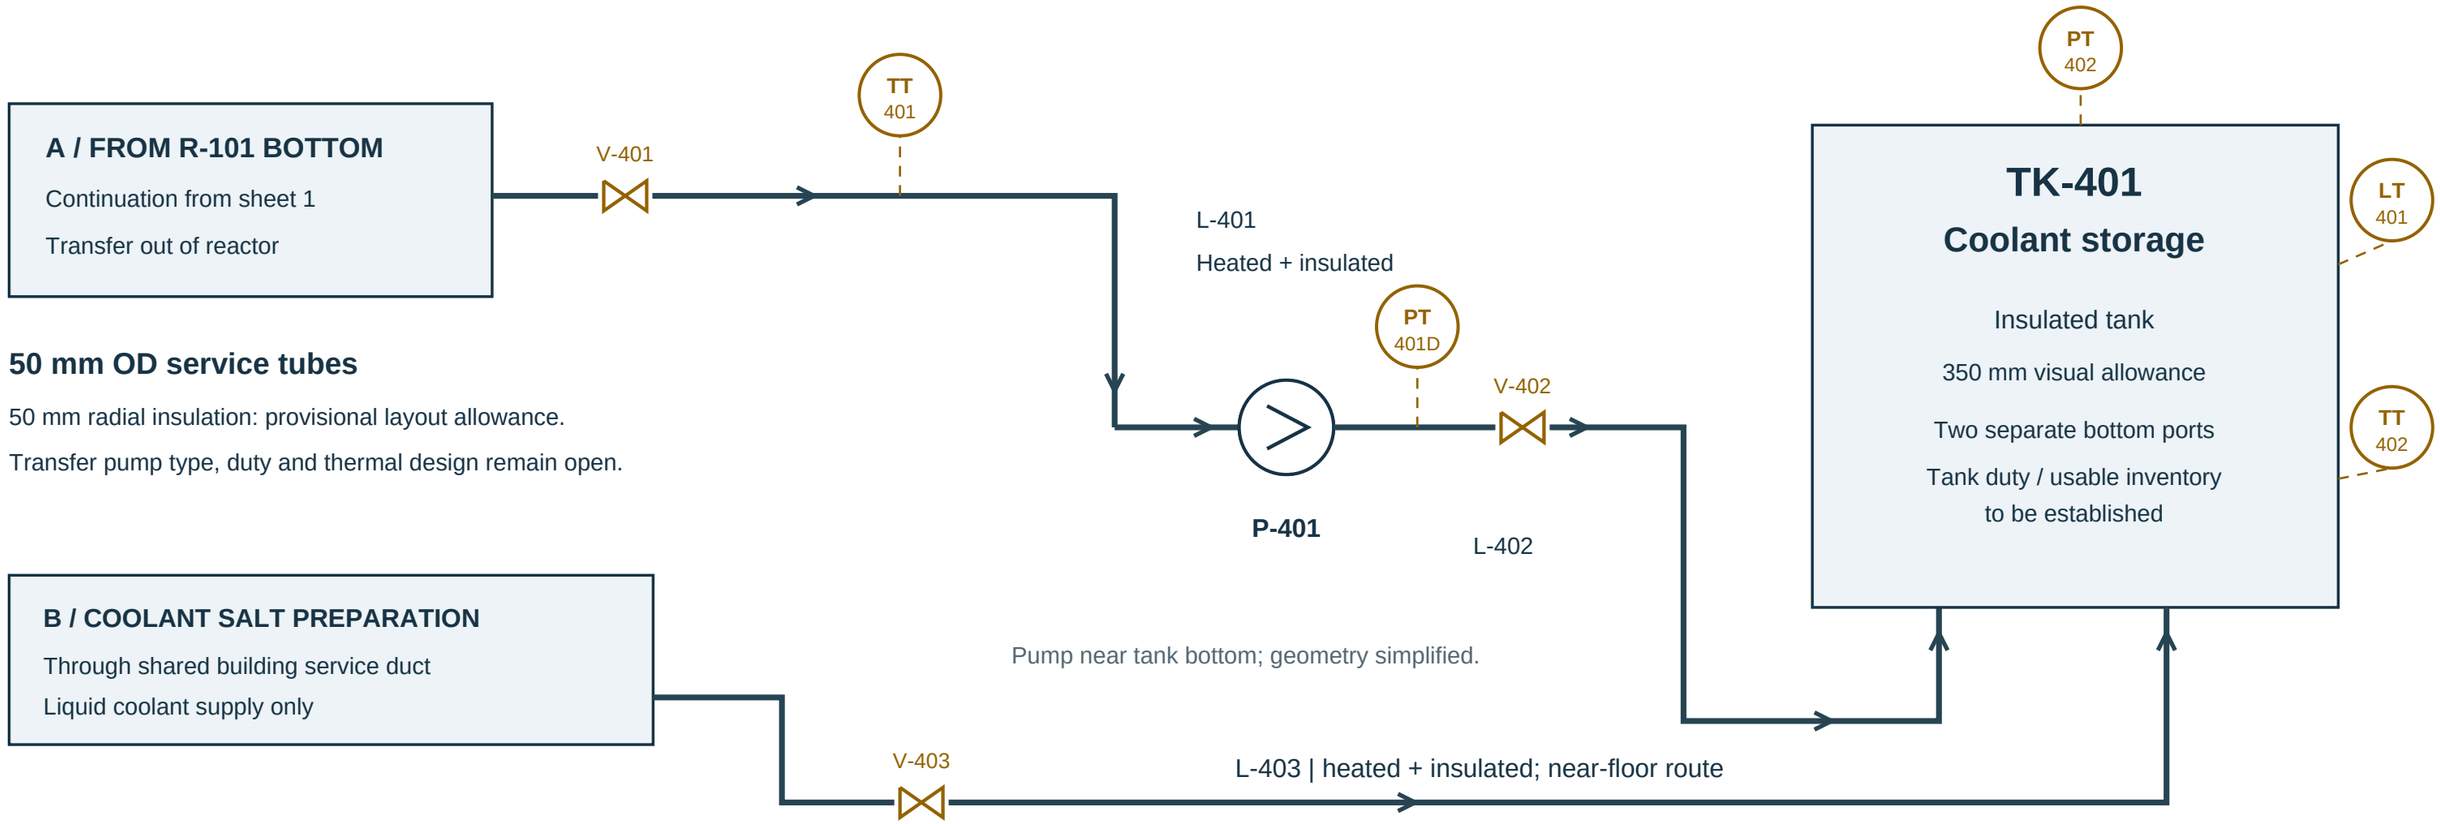

DRAWING CONVENTIONS

Solid pipes: established process connections; arrows show intended flow.
Red = hot circulation; blue = cool return; dark = storage / service.
Amber valves and instrument bubbles: proposals for review.
Dashed amber: measurement association, not an impulse or signal line.

TAG KEY / PROPOSAL LIMITS

TT temperature; PT pressure; FT flow; LT level (measurement intent).
V = candidate isolation valve; valve type and actuation not selected.
R reactor; SG steam generator; P pump; TK storage; L process line.
No control loops, alarm settings, trip logic or fail positions assigned.

OPEN: OPERATING AND MAINTENANCE STATES

Define reactor fill / refill path, complete draining and residual salt.
Establish inventory, tank freeboard, gas space and expansion provision.
Define preheat / heat tracing, freeze recovery and transfer sequencing.
Check pump suction conditions and shared-plenum flow distribution.

OPEN: PRESSURE BOUNDARIES AND PROTECTION

Establish pressure profile; 1 MPa(g) is only a wall-screening case.
Resolve SG tube-failure pressure from the 24 MPa(a) secondary side.
Define vent / relief destinations and trapped-salt thermal protection.
Review proposed isolation, measurement technology and remote access.